









ROOM FINISH SCHEDULE - SIMILAR FOR ALL UNITS						
ROOM	FLOOR	BASE	CEILING	HALLS	TRIM	REMARKS
BASMENT	CONC.	—	UNPAINTED	2" X 4" STUDS	—	CEILING STUDS UNPAINTED
OUTDOOR ENTRY	CONC.	—	RYNWOOD PAINTED	2" X 4" STUDS	—	NO FINISHES RYWOOD PAINTS PAINTED
LIVING RM.	HARDWOOD FLOOR	WOOD PAINTED	CONC. PAINTED	CONC. PAINTED	WOOD PAINTED	
DINING RM.	"	"	"	"	"	
KITCHEN	"	"	"	"	"	KITCHEN CABINETS PAINTED
RESTROOM	HARDWOOD FLOOR	WOOD PAINTED	CONC. PAINTED	CONC. PAINTED	WOOD PAINTED	
BATH	"	"	"	"	"	
BEDROOMS	"	"	"	"	"	
BATHROOM	"	"	"	"	"	
HALL	"	"	"	"	"	
DECK	CONC.	WOOD	RYNWOOD PAINTED	RYNWOOD PAINTED	WOOD PAINTED	

DOORS:
 ALL INTERIOR DOORS 1 3/8" HOLLOW CORE WITH
 MANOBAVY FACE VENEER (R.H. UNITS)
 ALL EXTERIOR DOORS 1 3/8" SOLID CORE WITH
 RE VENEER CARBIDE RM. DOOR 1 3/8" H.C. WITH FIRE VENEER
 ALL SLIDING DOOR DOORS 1 3/8" x 6'-8" x 5'-0" (FAM)
 HOLLOW CORE (R.H. UNITS)
 ALL INTERIOR DOORS TO HAVE STAIN FINISH
 ALL EXTERIOR DOORS TO HAVE ALUMINUM AND GLASS
 STORM DOOR WITH INTEGRAL SCREENED GRATE

WINDOW SCHEDULE		
TYPE	SIZE	DESCRIPTION
1	8'-0" x 4'-0"	HORIZONTAL SLIDING GLASS IN WOOD
2	8'-0" x 6'-0"	HORIZONTAL SLIDING GLASS IN WOOD
3	8'-0" x 6'-0"	"
4	8'-0" x 6'-0"	"
5	8'-0" x 6'-0"	"
6	8'-0" x 6'-0"	"

- NOTES:**
1. ALL FLOOR JOISTS TO BE NO. 1 CONSTRUCTION GRADE STUKE OR REMLOCK
 2. ALL WIND ASBESTOS TILE TO BE 0-08 DUBS
 3. EXHAUST FANS TO BE PROVIDED AT INTERIOR BATH ROOMS
 4. GRASS TILE UP TO 4'-0" HIGH IN BATH RM. AREA
 5. MEDICINE CABINET TO BE DUNNAGE MOUNTED
 6. SOAP & GRAS TO BE INSTALLED IN BATH RM. AREA
 7. TOWEL BAR WALL MOUNTED IN BATHROOM

NOTE: SEE ALTERNATE QUOTATION TO CHANGE ALL
 HARDWOOD FLOORS TO L.P.

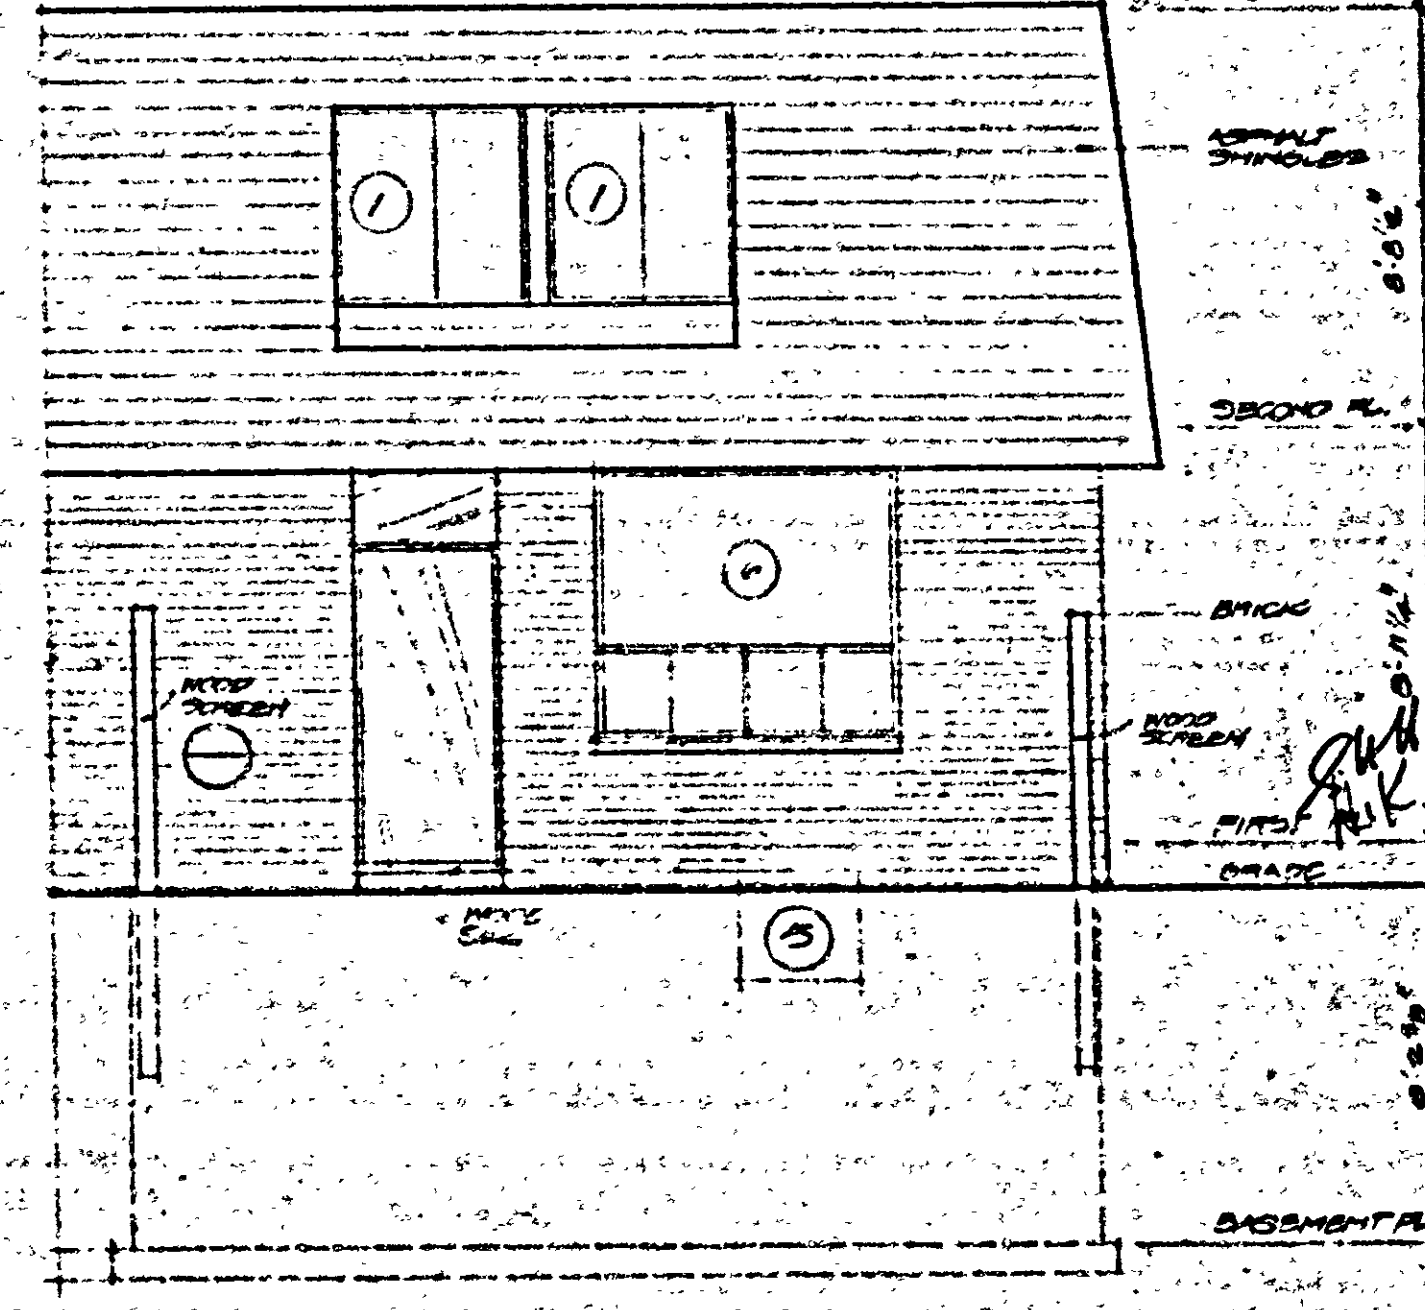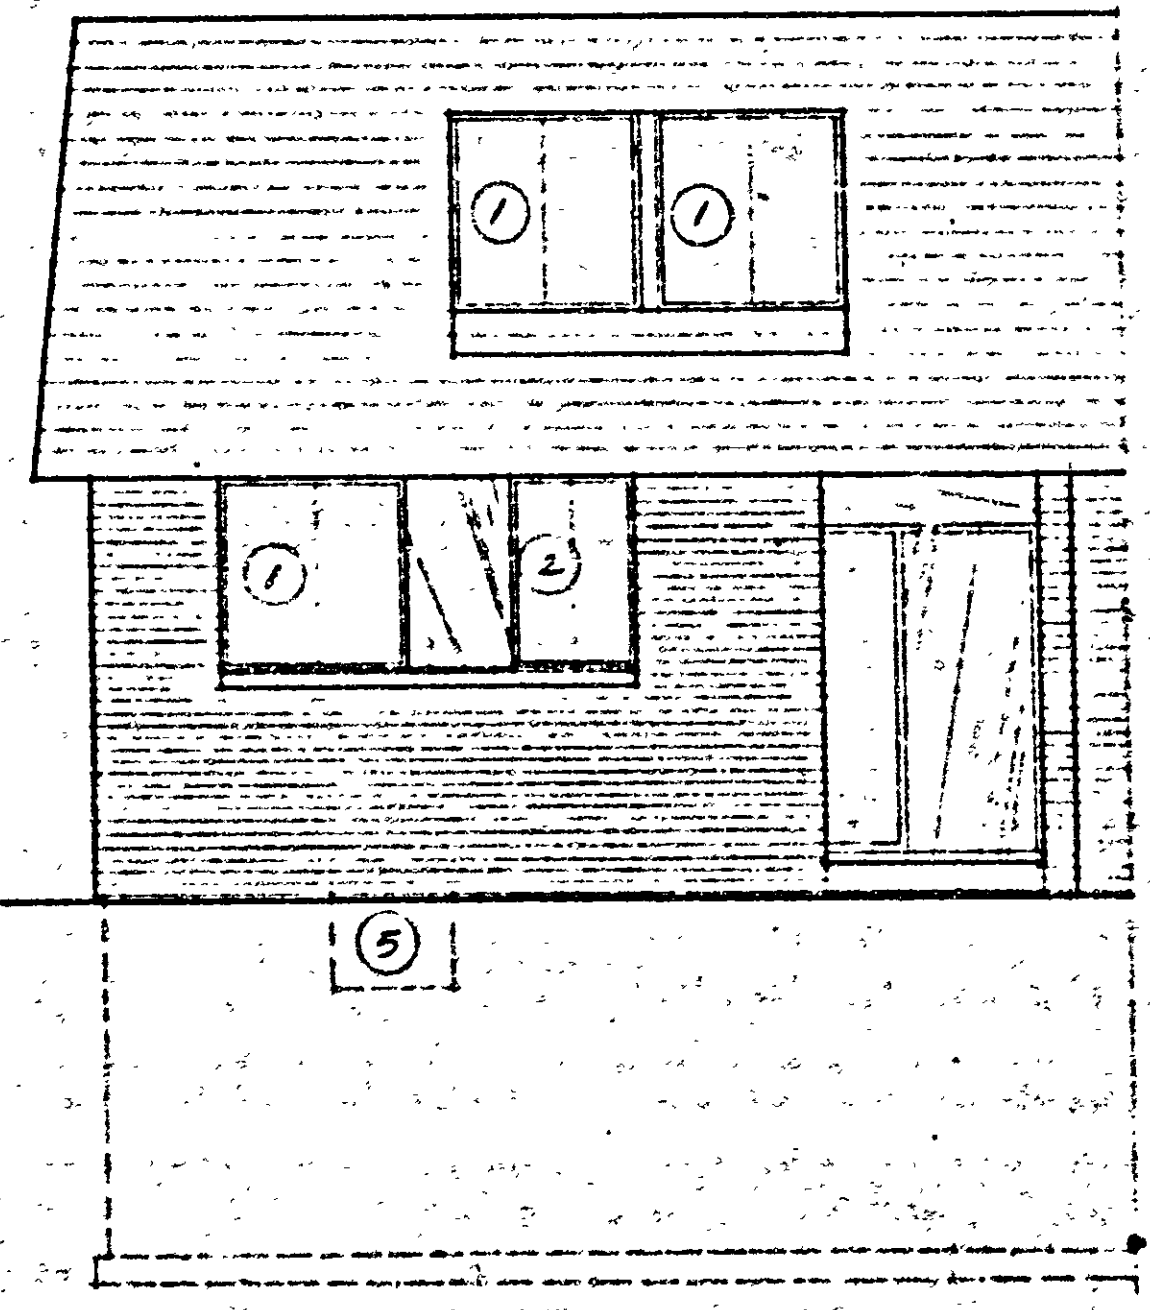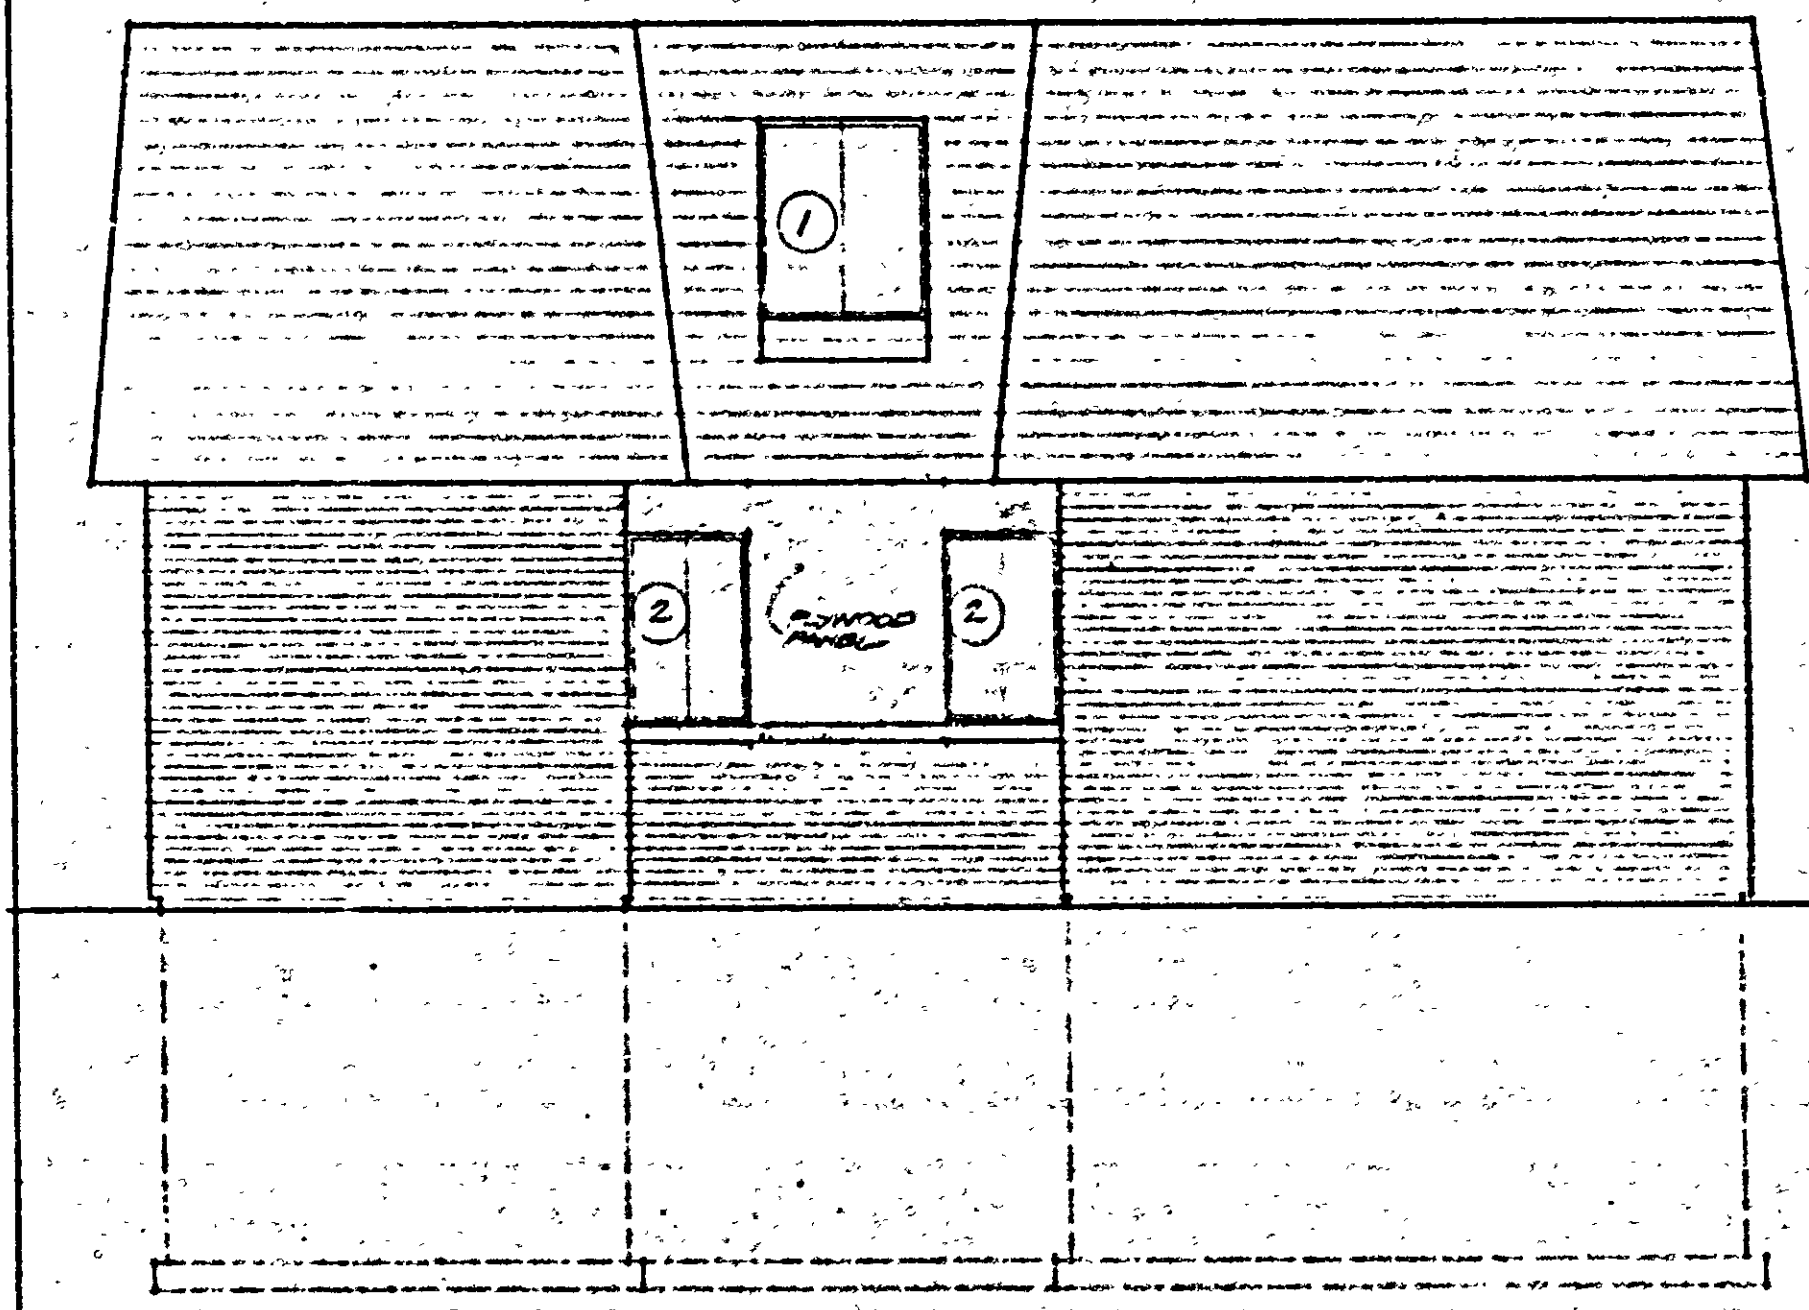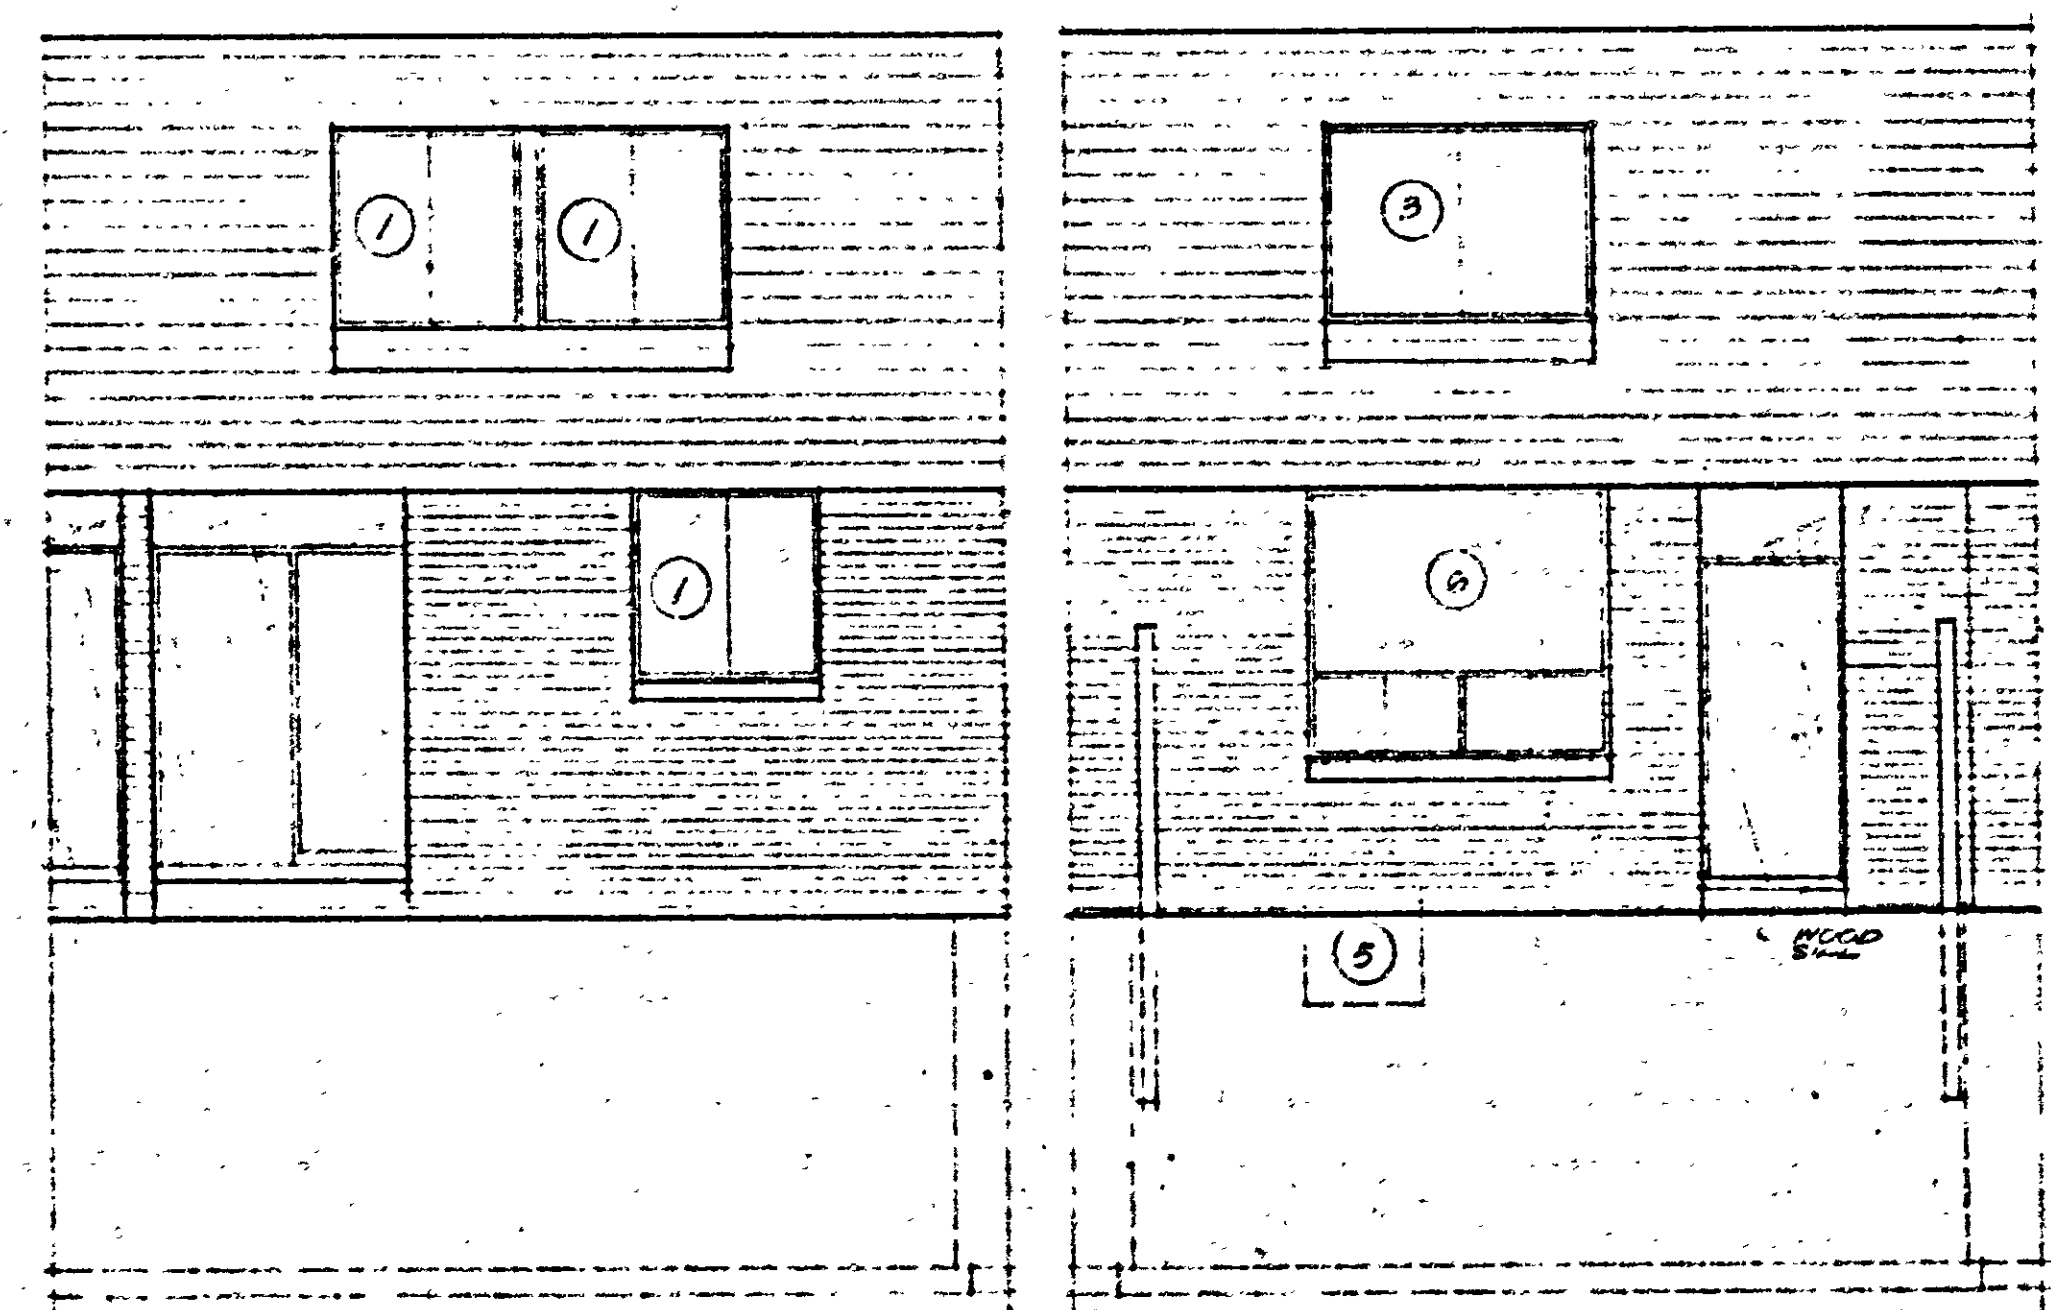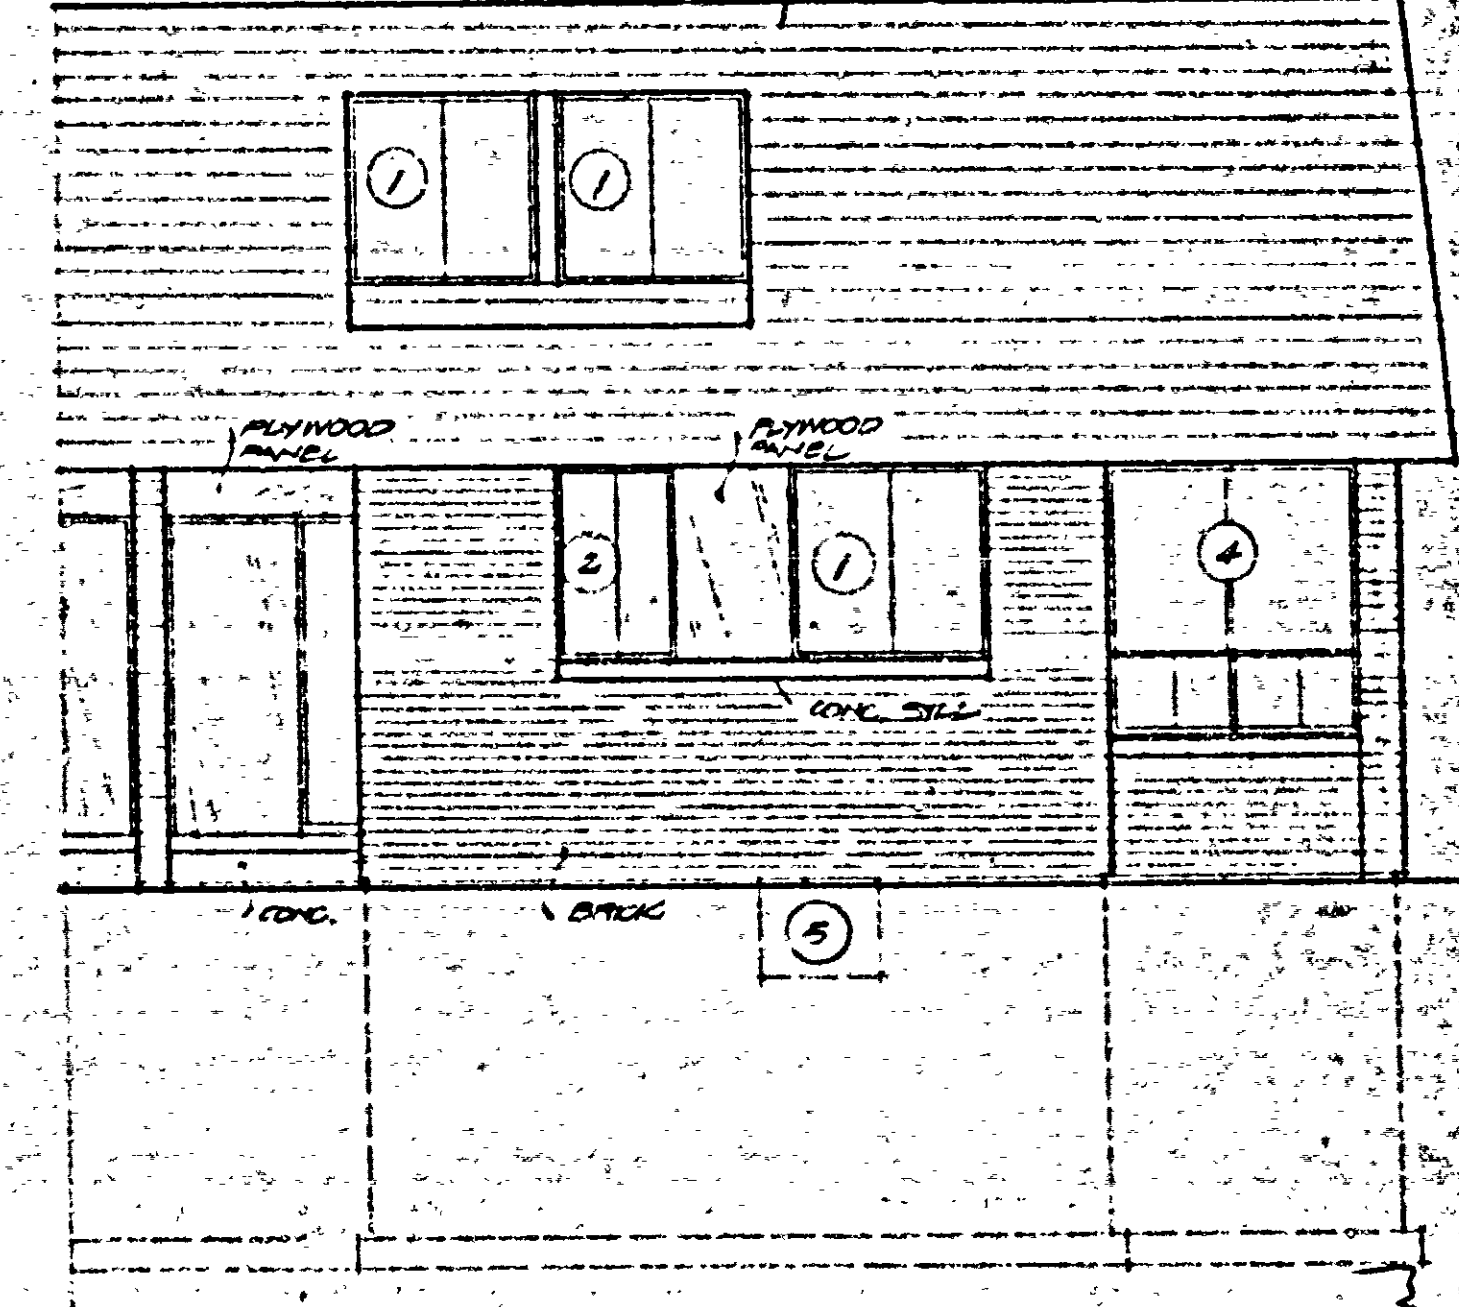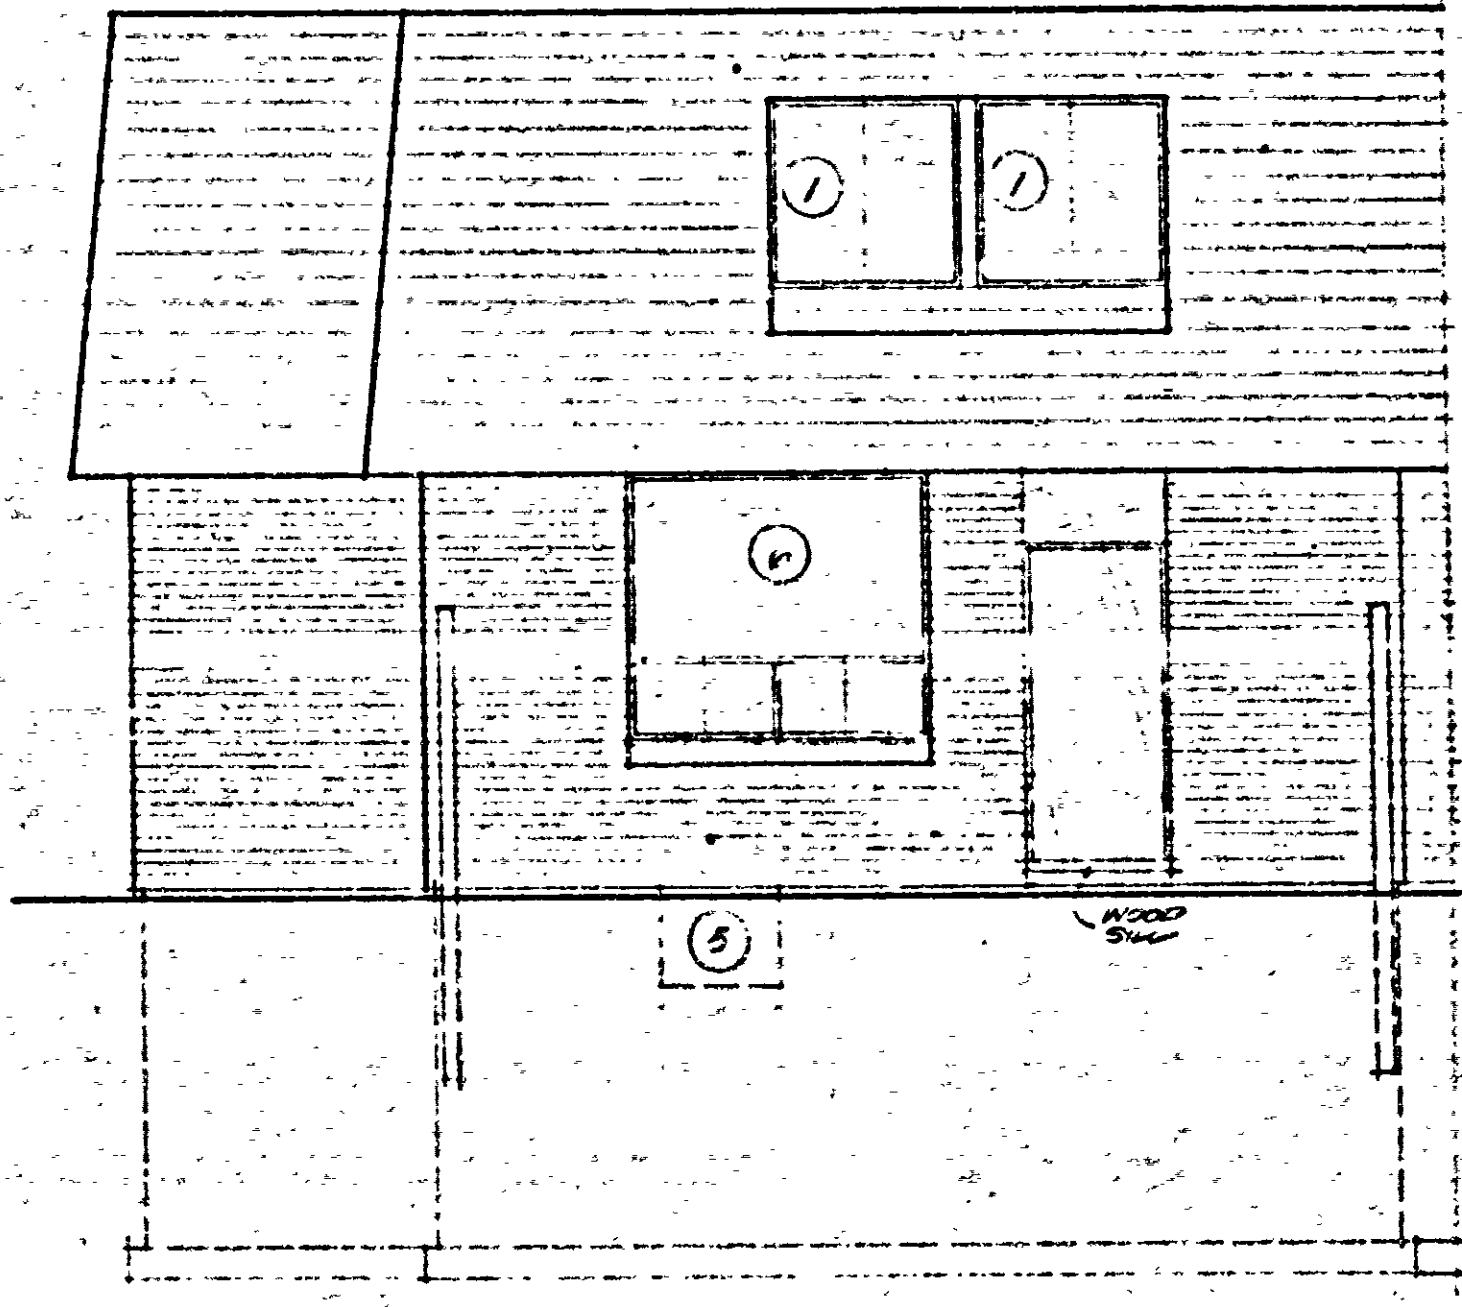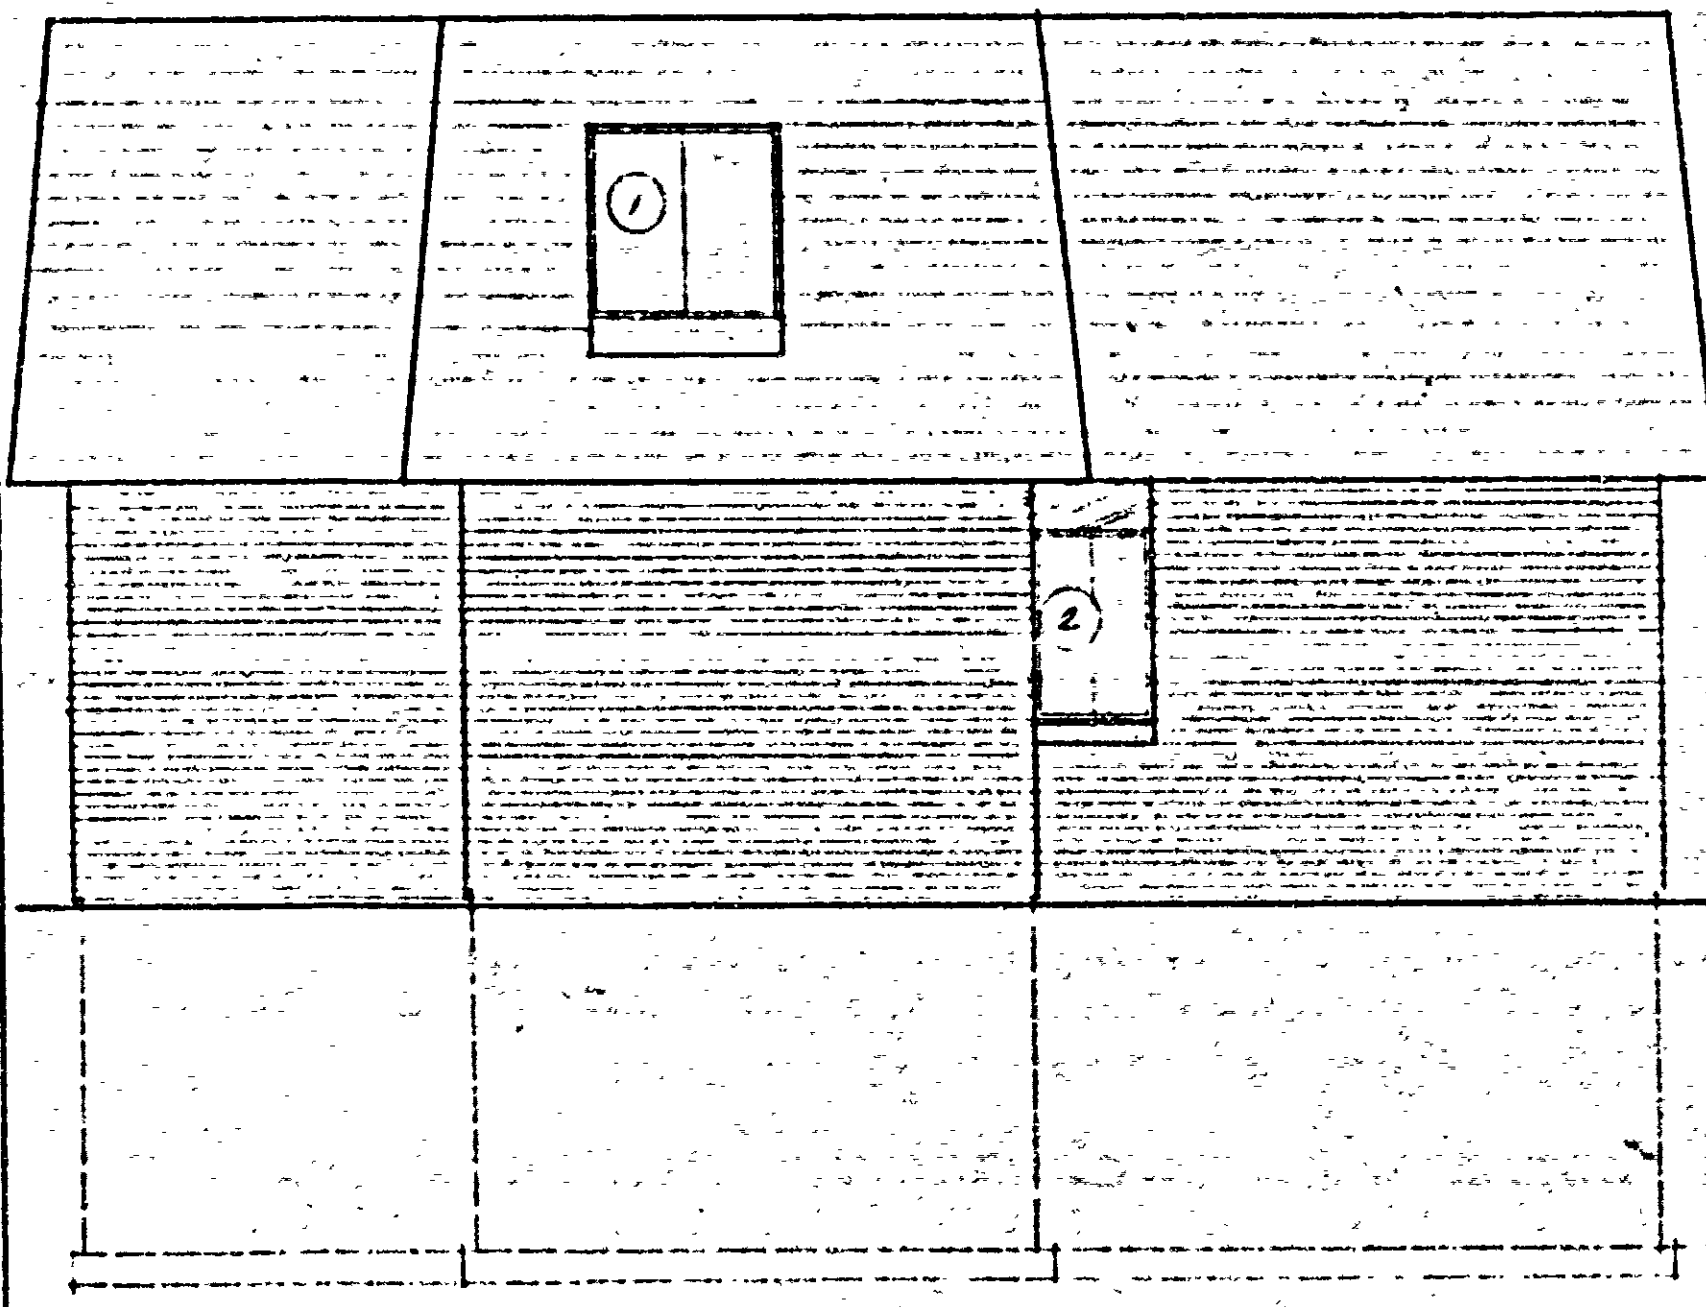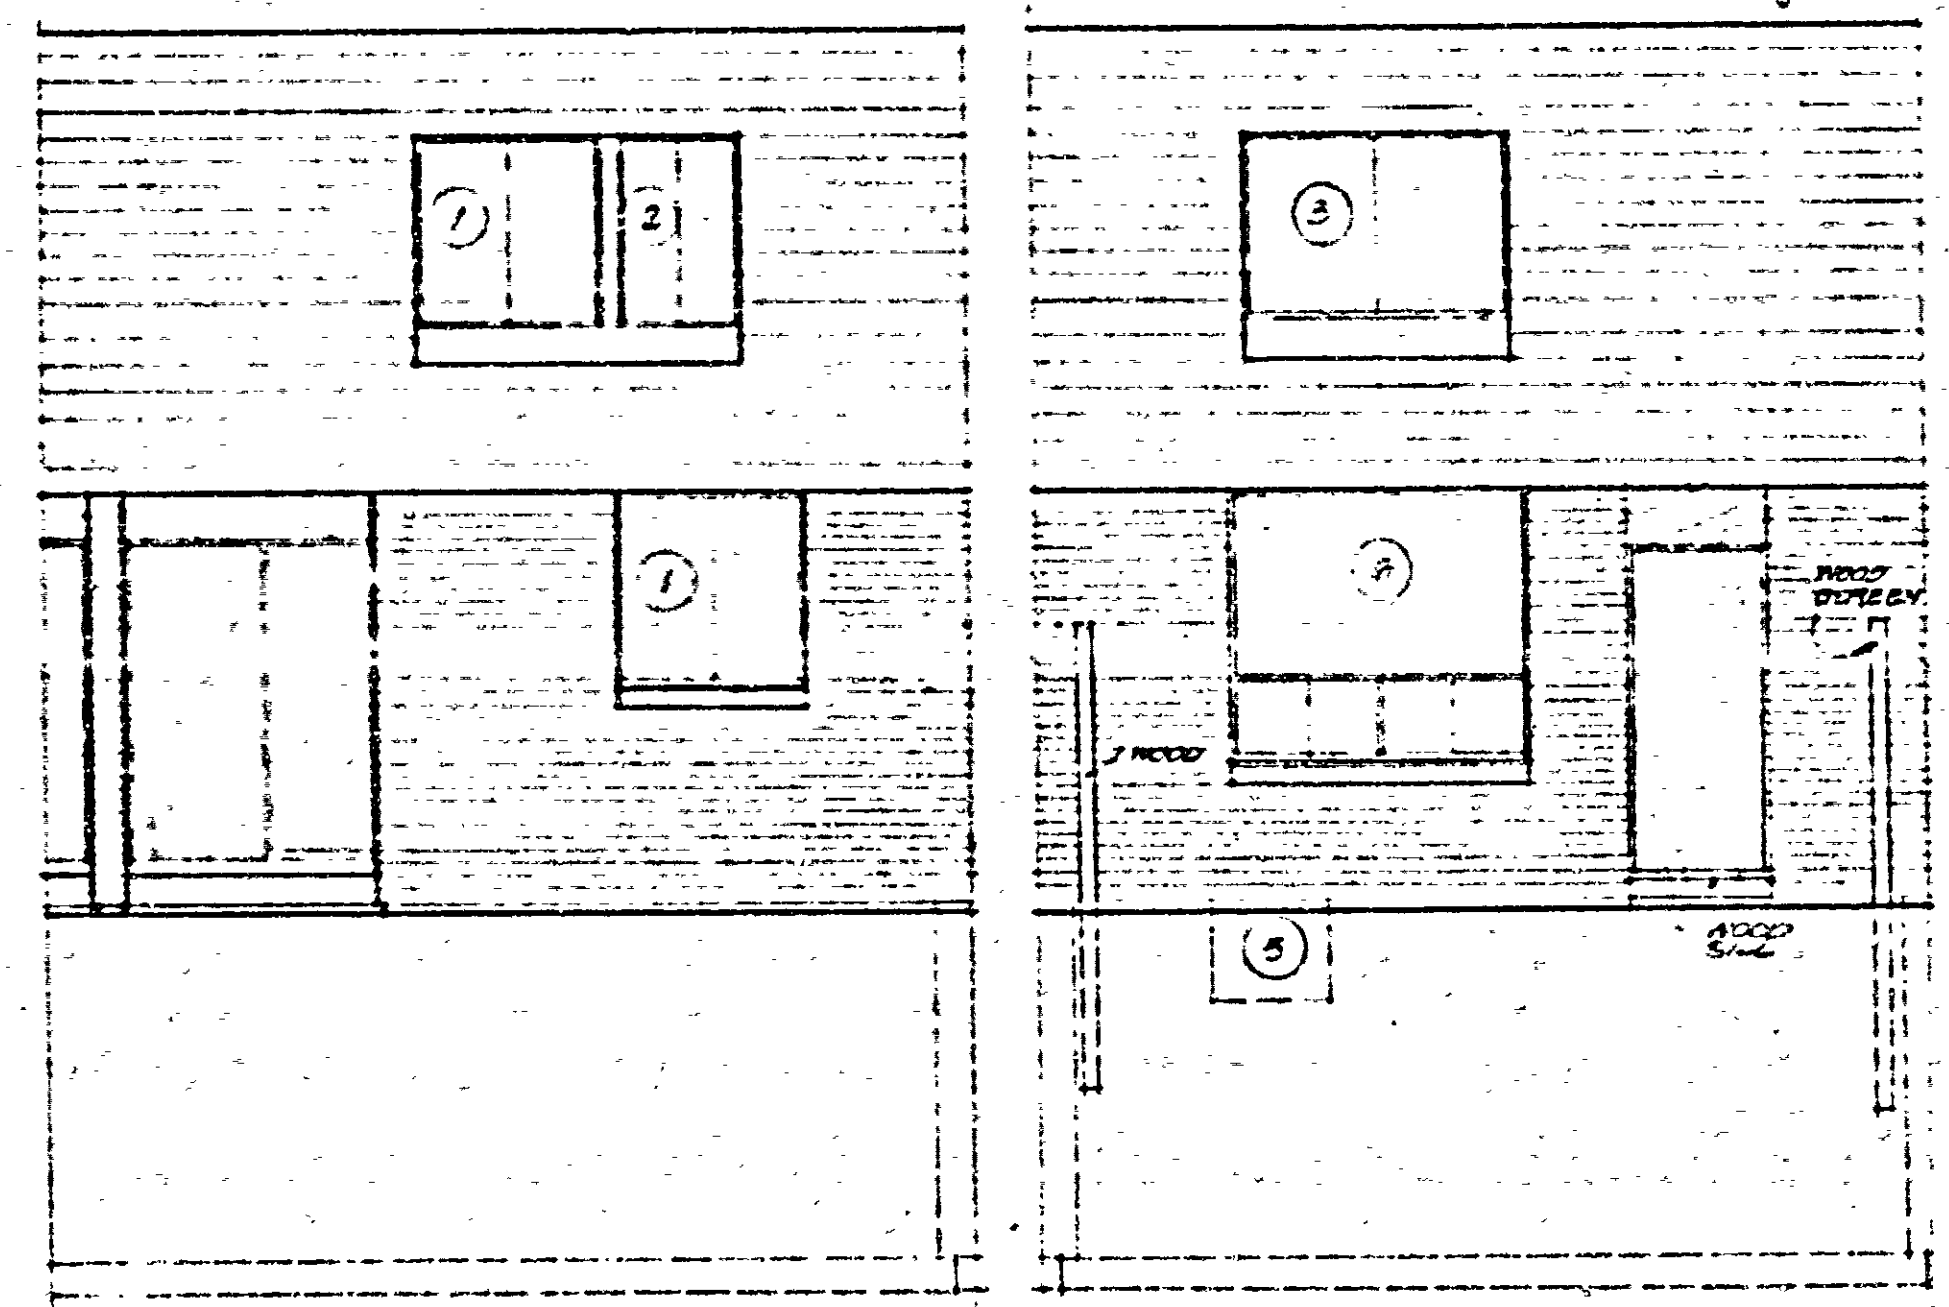

ELEVATIONS - M3108-A04

ONTARIO HOUSING CORPORATION
 FAMILY HOUSING PROJECT
 SHERBROOKE ST. PETERBOROUGH
 CHARLES HUFFMAN LTD - PETERBOROUGH
 GENERAL CONTRACTOR

WILLIAM LETT - ARCHITECT 45 COLBORNE ST. TORONTO L. TEL. 346-5682		DRAWING NO. 5 OF NINE	
SCALE 1/4" = 1'-0"	DATE MAY 11, 1970		
PROJECT NO. 8802			